MXG 437 XSafeEcoX
Modular Ice Machine 170 kg

Scotsman Ice Systems

Item	
Project	
Quantity	

FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control board with self diagnostic and malfunction alarms.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter, removable and washable (air cooled version only).
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

MXG L
Large Gourmet 39 g
Ø 38 mm - H 41 mm

MXG M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

MXG S
Small Gourmet 8 g
Ø 21 mm - H 25 mm

Model	Cube	Ø	H	Weight
MXG L	Large	38 mm	41 mm	39 g
MXG M	Medium	30 mm	34 mm	20 g
MXG S	Small	21 mm	25 mm	8 g

CONDENSING SYSTEM
Air cooled

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1

RECOMMENDED BIN

BIN	KG
SB393	181

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 170 kg

February 2025

MXG 437 XSafeEco

Modular Ice Machine 170 kg

Scotsman Ice Systems

Item	
Project	
Quantity	

Modular Ice Machine 170 kg

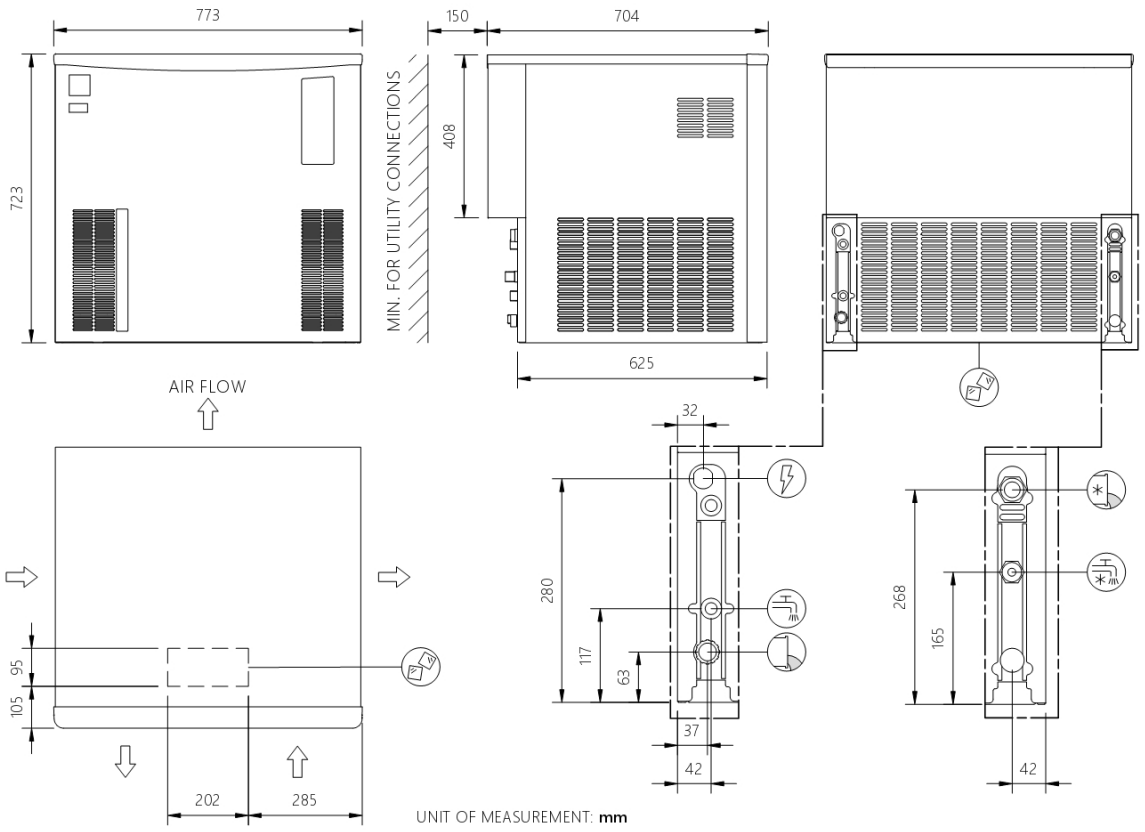

UNIT DATA		SHIPPING DATA		
Size (W x D x H)	773 x 704 x 721 mm	Size (W x D x H)	830 x 770 x 920 mm	(*) Data refer to 32°C Amb. / 21°C Water temperature conditions
Net weight	73 kg	Gross weight	85kg	

			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXG M 437 AS	230\50\1	A	170	165	135	2,8	27	18	1.400	3 x 1,5	16
MXG S 437 AS	230\50\1	A	165	155	135	2,8	26	28	1.400	3 x 1,5	10
MXG L 437 AS	230\50\1	A	157	160	130	2,8	26	14	1.400	3 x 1,5	10